


M7200 Series
Monochrome laser multifunction printer

Enjoy additional value with the 4in1 high speed printer





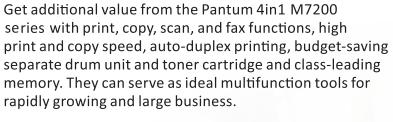

Automatic duplex printing



Separate Drum and Toner



up to 24 ppm



4 N 1 Print/Copy/Scan/Fax

Convenient to Print



SPECIFICATIONS



M7200 Series

M7200FD M7200FDN M7200FDW Model **Printing** 33ppm(A4) / 35ppm(Letter) Print speed Resolution (print, copy, scan, fax)⁽¹⁾ Print: 1200 x 600 dpi; Copy: 600 x 600 dpi; Scan: flatbed 1200×1200dpi / ADF 600×600dpi First print out time Less than 8.2s 25000 pages Max. monthly volume Recommended monthly volume 250 to 3000 pages Processor speed 600 MHz Memory 256 MB Copying 33cpm(A4) / 35cpm(Letter) Copy speed FB:Less than 10s; ADF:Less than 11s First copy out time Zoom 25% - 400% 1 - 99 pages Max.copy pages ID copy, Receipt copy, N-up copy, Clone copy, Poster copy, Manual duplex copy, Collated copy Additional function Scan speed 24 ppm(A4) / 25 ppm(Letter) Max.scan size Flatbed 216 x 297 mm / ADF 216 x 356mm Scan to E-mail, PC, FTP, Scan to E-mail, PC, FTP, Output function Scan to PC, Thumb drive Thumb drive, iOS/Android Thumb drive Color scanning Yes axing Fax type Mono Modem speed 33.6Kbps 650 pages Memory Coded system MH/MR/MMR/JBIG Compatibility ITU-T SG3 / ECM Fax feature PC-FAX(only sending), Junk Fax Barrier, Multi-send, Fax Forwarding, Quick-dial, Group Dial, Delayed Send, Auto Redial, Auto Receive, Auto Reduction, Mobile Fax aper handling Paper input tray 250 pages Multipurpose tray 1 page Paper output tray 120 pages (A4/70g) Media types Plain, Thick, Thin, Transparency, Cardstock, Label, Envelope A4, A5, JIS B5, ISO B5, A6, Letter, Legal, Executive, Folio, Oficio, Statement, Japanese Postcard, Monarch Env, DL Env, C5 Env, C6 Env, No.10 Env, ZL, Big 16K, Media sizes Big 32K, 16K, 32K, B6, Yougata4, Postcard, Younaga3, Nagagata3, Yougata2 Media weight Input tray: 60-105g/m² Multipurpose tray: 60-200g/m² General Dimensions (wxdxh) 415 x 365 x 350mm(16.3 x 14.4 x 13.8in) Weight (without toner cartridge) 11.39kg (25.1lb) 110V Model: AC100-127V(±10%), 50/60Hz(±2Hz), 9A Input voltage 220V Model: AC220-240V(-15%,+10%), 50/60Hz(±2Hz), 4.5A Printing: \leq 52dB(A) Copying: \leq 54dB(A) Scanning: \leq 52dB(A) Standby: \leq 30dB(A) Noise Windows Server2003 / 2008 / 2012 / XP / Vista / Win 7 / Win 8 / Win8.1 / Win10 (32/64 Bit); Operating system compatibility Mac OS 10.7~10.11; Linux: Ubuntu12.04/14.04 (32/64 Bit) iOS 7.0 and above; Mobile Operating system compatibility Android 4.0 and above HI-Speed USB2.0 HI-Speed USB2.0 Net: IEEE 802.3 HI-Speed USB2.0 Interface Net: IEEE 802.3 10/100Base-Tx 10/100Base-Tx WiFi: IEEE 802.11b/g/n Supplies Cartridge style Separate drum and toner Starter cartridge capacity / Drum unit lifetime $^{(2)}$ TL-410 (1500 pages) / DL-410 (12000 pages)

Cartridge:TL-410 (1500 pages, Standard); TL-410H (3000 pages, High); TL-410X (6000 pages, Extra high) Drum: DL-410 (12000pages)

Cartridge and drum capacity (2)

⁽¹⁾ Up to (2) As per ISO/IEC 19752 specification (Individual users will experience different results based on their environment and page coverage)